



## SOLARMAN REGISTRATION PROCESS

1. Open solarman Page:- <https://home.solarman.cn/login.html>

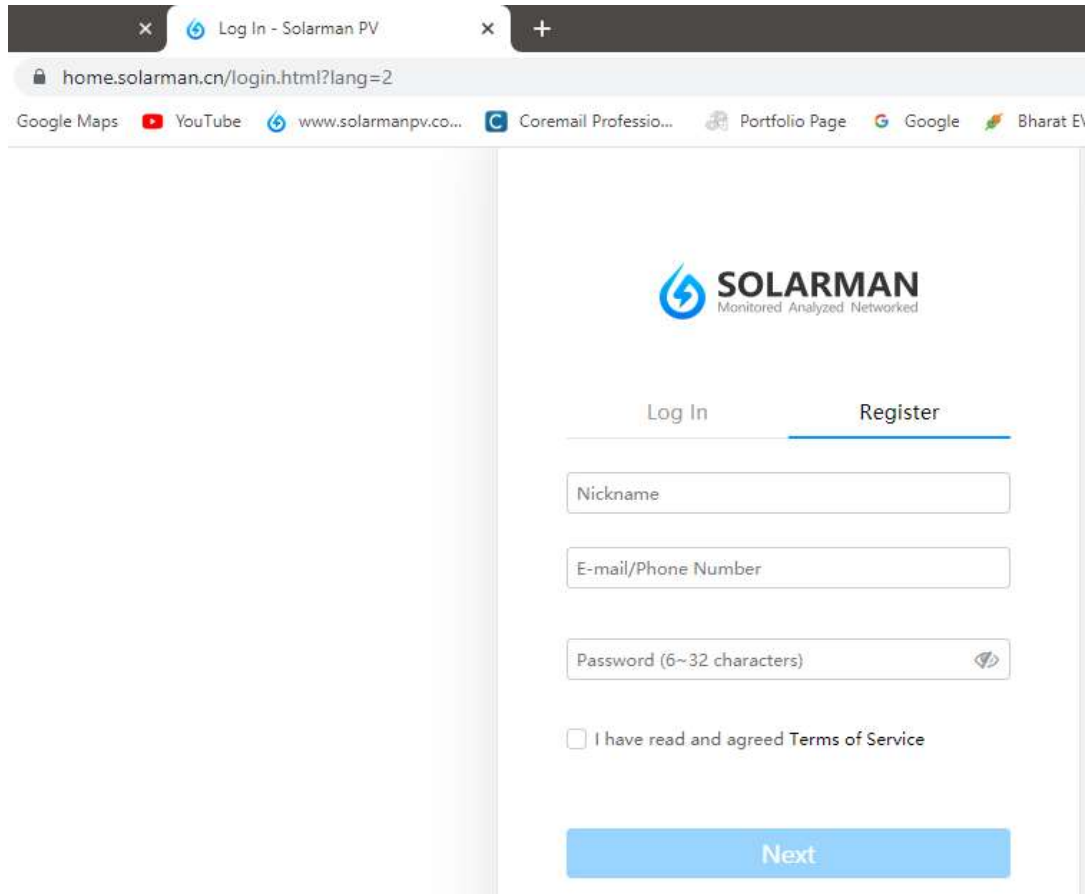

The screenshot shows a web browser window with the URL `home.solarman.cn/login.html?lang=2`. The page features the Solarman logo with the tagline "Monitored Analyzed Networked". Below the logo, there are two tabs: "Log In" and "Register", with "Register" being the active tab. The registration form includes three input fields: "Nickname", "E-mail/Phone Number", and "Password (6~32 characters)". Below these fields is a checkbox labeled "I have read and agreed Terms of Service". At the bottom of the form is a blue "Next" button.

2. Write Name, Mail id and Password and Click on Next.

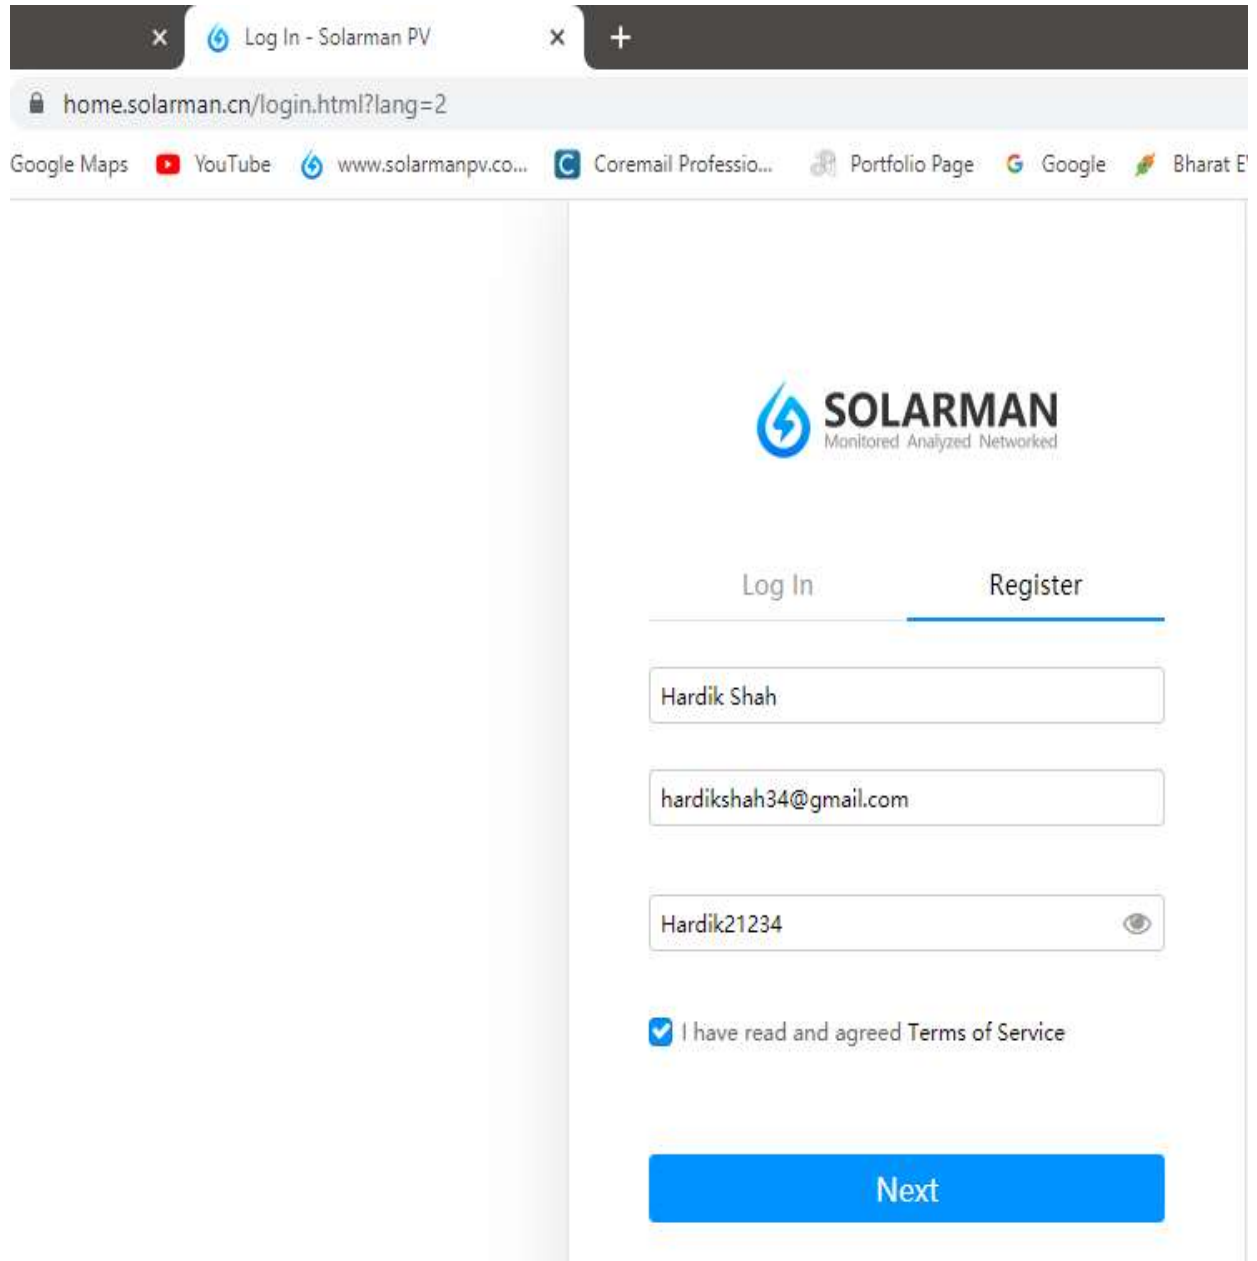

The screenshot shows a web browser window with the URL `home.solarman.cn/login.html?lang=2`. The browser's address bar and tabs are visible. The page content includes the Solarman logo with the tagline "Monitored Analyzed Networked". Below the logo, there are two tabs: "Log In" and "Register", with "Register" being the active tab. The registration form consists of three input fields: a name field containing "Hardik Shah", an email field containing "hardikshah34@gmail.com", and a password field containing "Hardik21234" with a visibility toggle icon. Below the fields is a checkbox labeled "I have read and agreed Terms of Service" which is checked. At the bottom of the form is a large blue button labeled "Next".

Log In Register

Hardik Shah


hardikshah34@gmail.com

Hardik21234

I have read and agreed Terms of Service

Next

### 3. Click on Plant and go to Build Plant Option.

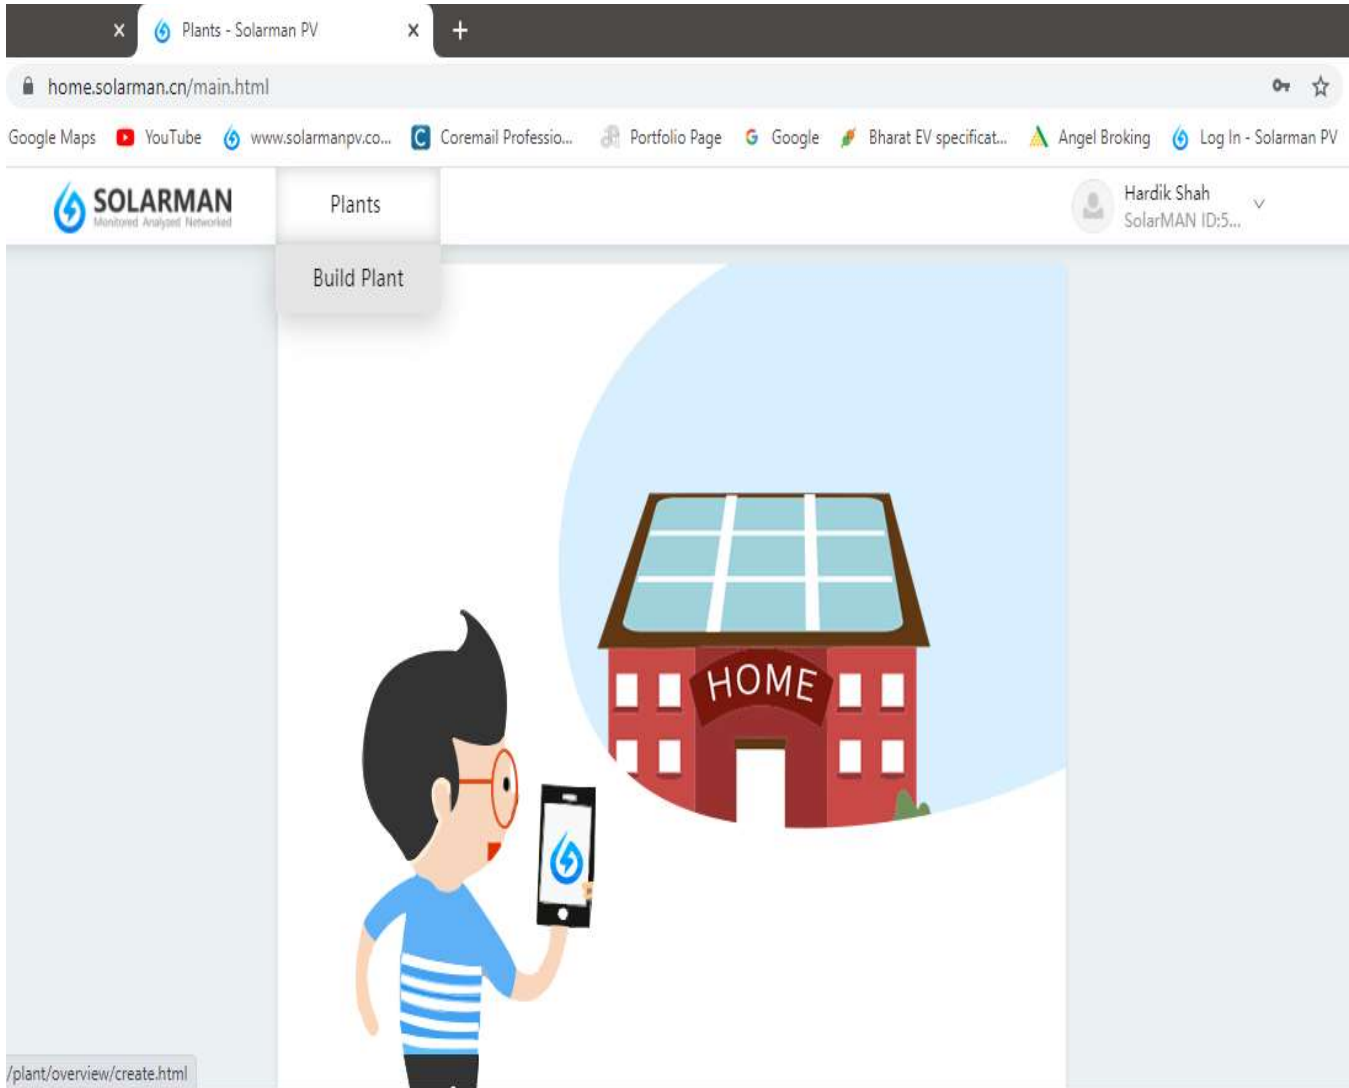

#### 4. In Built Plant option write name, Select your Plant and System Type.

home.solarman.cn/main.html

Google Maps YouTube www.solarmanpv.co... Coremail Professio... Portfolio Page Google Bharat EV specificat... Angel Broking Log In - Solar

**SOLARMAN** Monitored Analyzed Network Plants Hardik Shah SolarMAN ID:5...

1 Confirm Plant Description 2 Confirm Correlation Info



Name

Plant Type  Residential Rooftop  Commercial Rooftop  Industrial Rooftop  Ground Mounted

System Type  All on Grid  Self-consumption  Off-grid  Storage System  Utility-scale All Power on Grid

Location

## 5. Select your Location of address and Fix it .

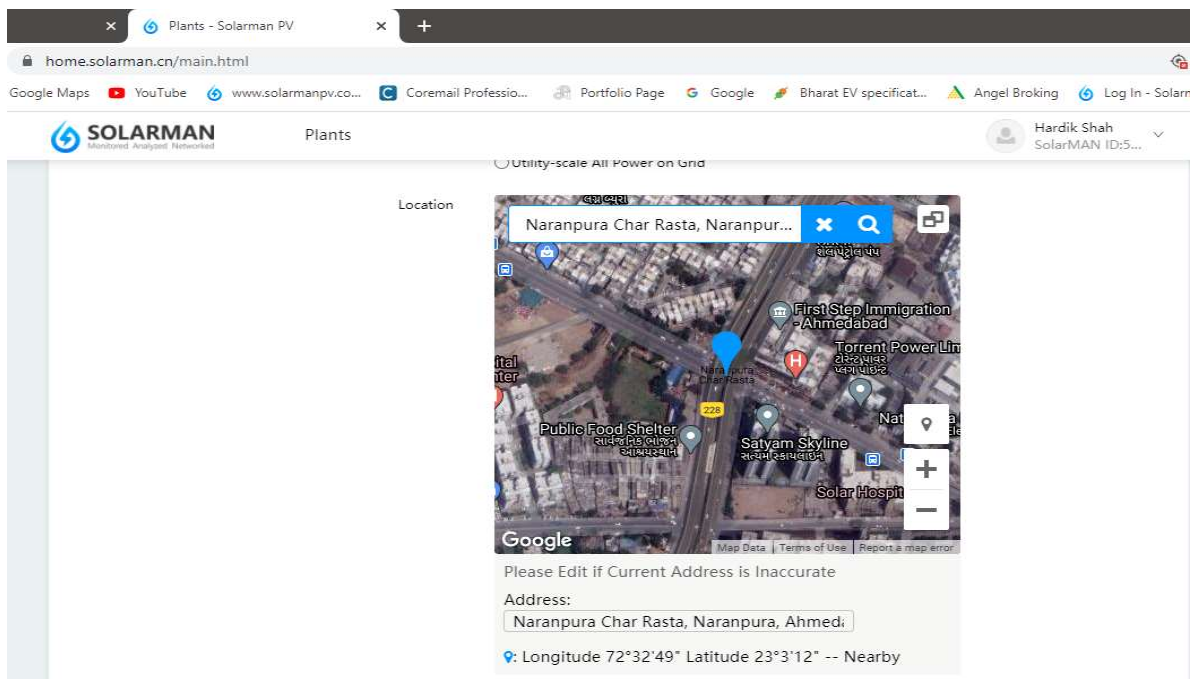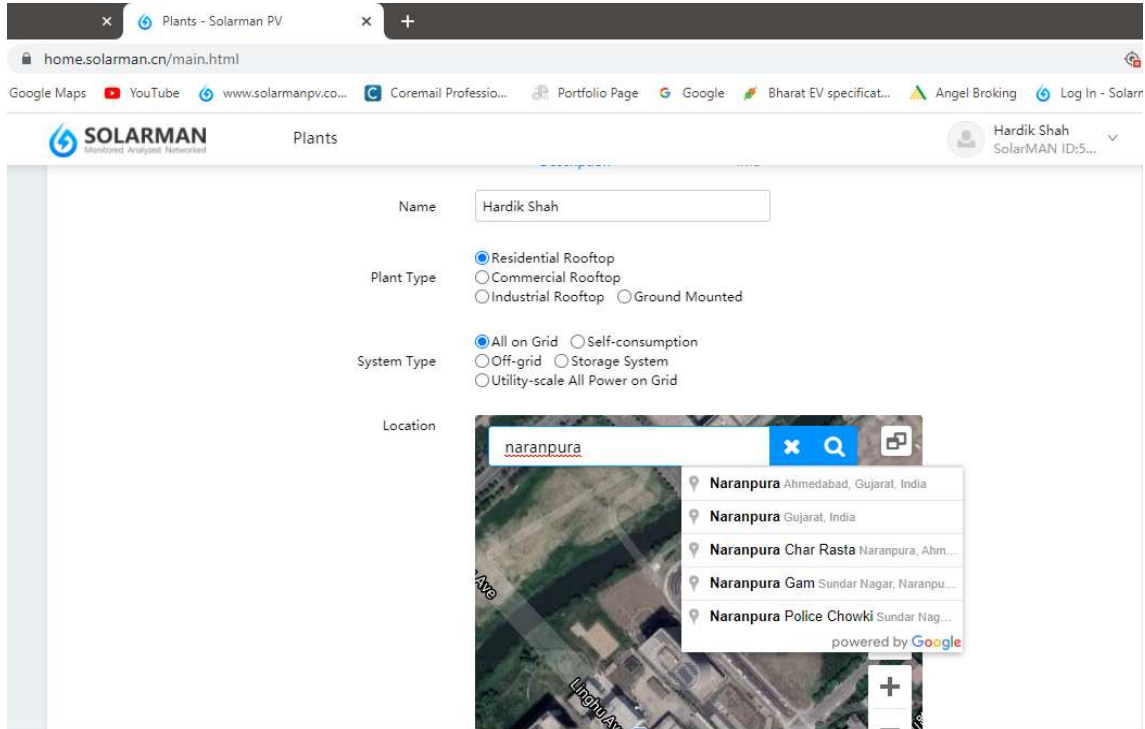

## 6. Select Time Zone , Currency.

The screenshot shows the Solarman PV Plants configuration interface. The browser address bar displays `home.solarman.cn/main.html`. The page header includes the Solarman logo and the user name "Hardik Shah" with a SolarMAN ID. The main configuration area contains the following settings:

- Time Zone:** (UTC+05:30) Chennai,Kolkata,Mumbai,...
- Azimuth (°):** 180°
- Angle of Tilt (°):** 26°
- Currency:** CNY (with a dropdown menu open showing options: LBP, BAM, PEN, NZD, **INR**, SYP, DKK, UVU, TRY, CHF, VEF, AED)
- Benchmark Price(CNY/kWh):** (field is empty)
- Generation Province FIT(CNY/kWh):** (field is empty)
- Generation City FIT(CNY/kWh):** (field is empty)
- Generation County FIT(CNY/kWh):** (field is empty)
- Constructing Cost(CNY):** (field is empty)
- Period (yr):** Three dropdown menus, each set to 0.

7. Select Benchmark means INR/KWh as per your region.

The screenshot displays the 'Plants' configuration page in the Solarman PV software. The interface includes a header with the Solarman logo and user information (Hardik Shah, SolarMAN ID:5...). The main content area contains several configuration options:

- Angle of Tilt (°):** A slider set to 26°.
- Currency:** A dropdown menu set to INR.
- Benchmark Price(INR/kWh):** A text input field containing 6.00, highlighted with a red box.
- Generation Province FIT(INR/kWh):** A text input field containing 0.
- Period (yr):** A dropdown menu set to 0.
- Generation City FIT(INR/kWh):** A text input field containing 0.
- Period (yr):** A dropdown menu set to 0.
- Generation County FIT(INR/kWh):** A text input field containing 0.
- Period (yr):** A dropdown menu set to 0.
- Constructing Cost(INR):** A text input field containing 24750.00.
- Constructing FIT(INR):** A text input field containing 1000.
- Loan Proportion (%):** A slider set to 0%.

## 8. Add Contact Number and Click on Next.

The screenshot shows the 'Plants' form in the Solarman PV system. The form includes the following fields and options:

- Generation County FIT(INR/kWh): 0
- Period (yr): 0
- Constructing Cost(INR): 24750.00
- Constructing FIT(INR): 1000
- Loan Proportion (%): 0% (slider)
- Annual Loan Rate (%): 0
- Period (yr): 0
- Refund Method:  Fixed Basis Mortgage,  Fixed Payment Mortgage
- Contact Number: 8511225380

A blue 'Next' button is located at the bottom center of the form.


## 9. Build plant process complete and Press on Construction Complete.

The screenshot shows the 'Plants' form in the Solarman PV system, indicating the completion of the build process. The form includes the following elements:


- Progress bar with two steps: 1. Confirm Plant Description, 2. Confirm Correlation Info.
- Founder: Hardik Shah( Owner )
- Buttons: Back, Construction Completed




10. After this one POP UP generate for addition of Serial number of Dongle.

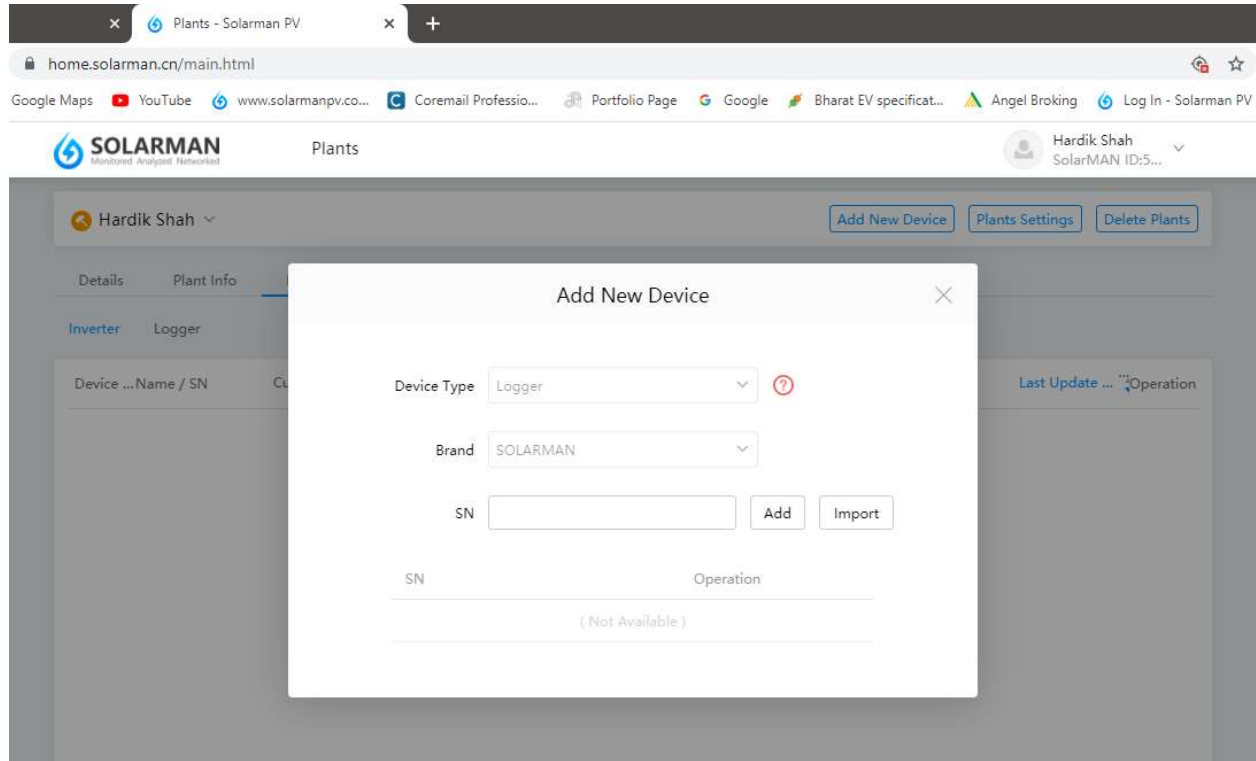

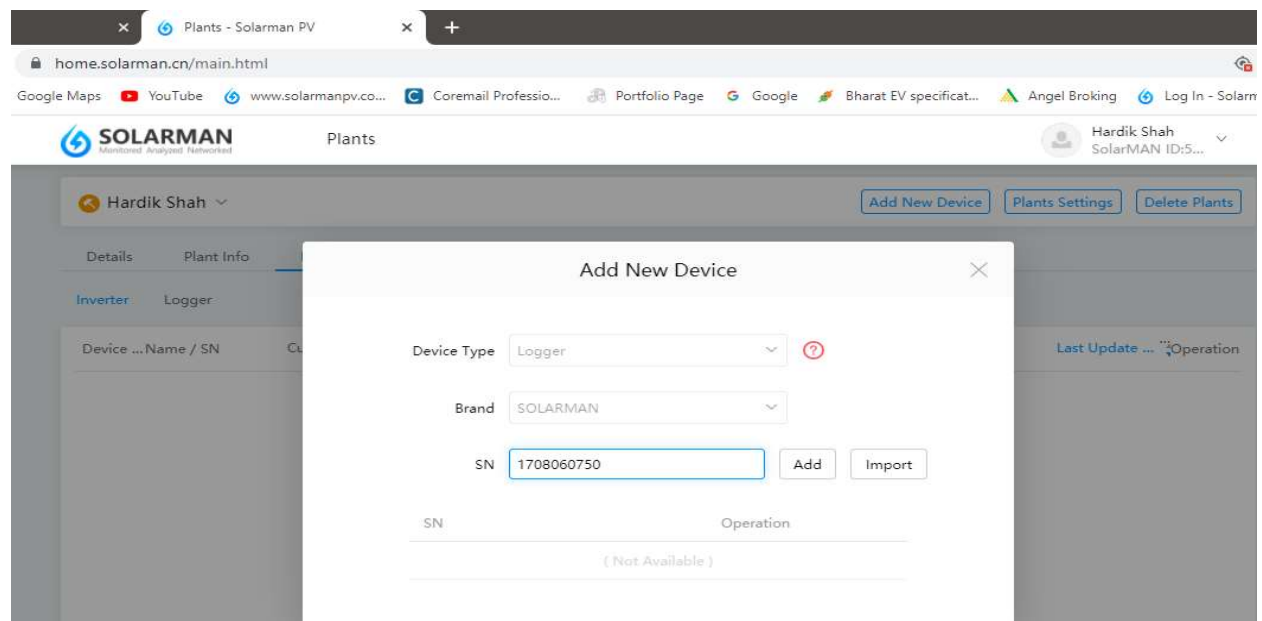

11. Write Dongle serial number and press Add.

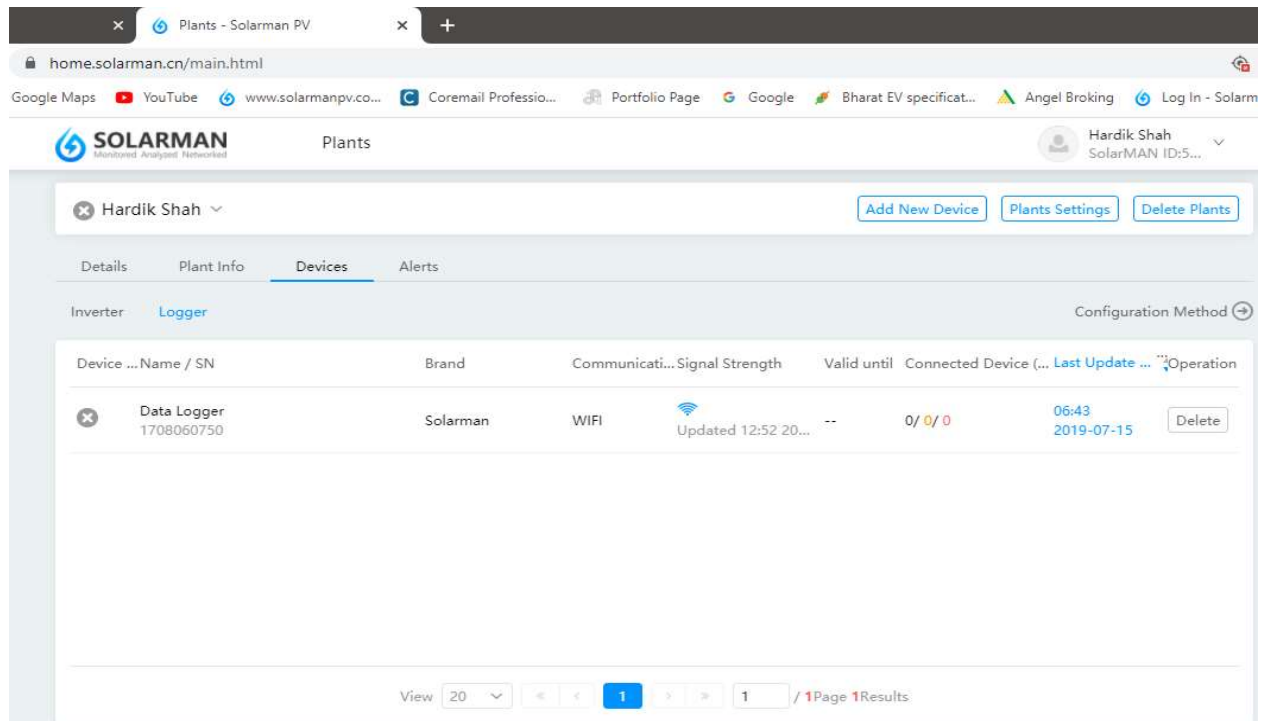

12. After addition of datalogger your dongle serial number will show in Device Option of your Plant.




The screenshot shows the Solarman PV Plants management interface. The user is logged in as Hardik Shah. The 'Devices' tab is selected, and the 'Logger' sub-tab is active. A table lists the installed devices:



| Device ...Name / SN                                                                                         | Brand    | Communicati... | Signal Strength                                                                                       | Valid until | Connected Device (... | Last Update ...     | Operation |
|-------------------------------------------------------------------------------------------------------------|----------|----------------|-------------------------------------------------------------------------------------------------------|-------------|-----------------------|---------------------|-----------|
|  Data Logger<br>1708060750 | Solarman | WIFI           |  Updated 12:52 20... | --          | 0/0/0                 | 06:43<br>2019-07-15 | Delete    |

At the bottom, there is a pagination control showing 'View 20' and '1 / 1 Page 1 Results'.

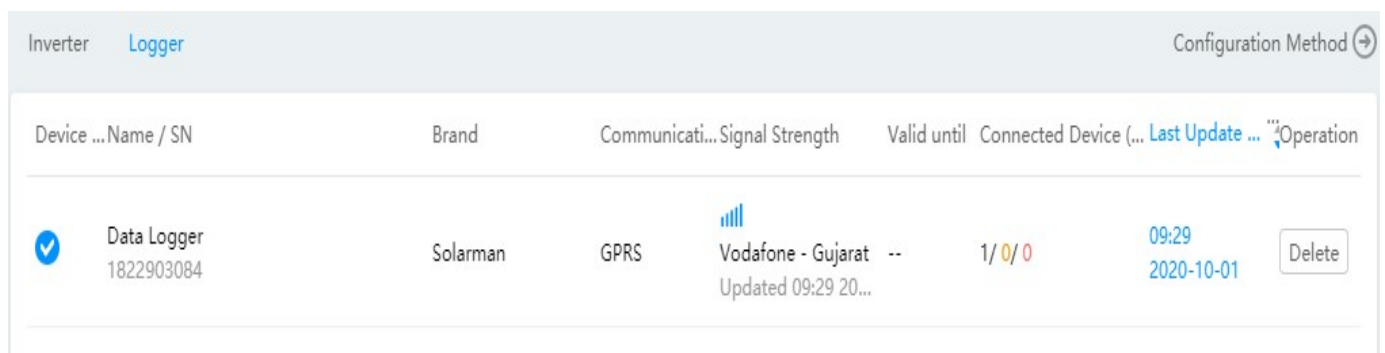13.If your Plant is ONLINE then it will show YES sign.



The screenshot shows the Solarman PV Plants management interface with the 'Logger' sub-tab active. The table now shows a device in an ONLINE state:

| Device ...Name / SN                                                                                           | Brand    | Communicati... | Signal Strength                                                                                                               | Valid until | Connected Device (... | Last Update ...     | Operation |
|---------------------------------------------------------------------------------------------------------------|----------|----------------|-------------------------------------------------------------------------------------------------------------------------------|-------------|-----------------------|---------------------|-----------|
|  Data Logger<br>1822903084 | Solarman | GPRS           |  Vodafone - Gujarat<br>Updated 09:29 20... | --          | 1/0/0                 | 09:29<br>2020-10-01 | Delete    |

14. If you want to Delete Dongle from your Plant then select Delete option and then confirm for Delete.

The screenshot shows a web browser window with the URL `home.solarman.cn/main.html`. The page title is "Plants - Solarman PV". The user is logged in as "Hardik Shah" with a SolarMAN ID. The interface includes a navigation menu with "Details", "Plant Info", and "Devices". The "Devices" section is active, showing a table of devices. A "Please Confirm" dialog box is overlaid on the page, asking for confirmation to delete a device. The dialog box contains the following text:

You are going to delete following devices, continue?

| Device Name | SN         | Connected Device Number |
|-------------|------------|-------------------------|
| Data Logger | 1708060750 | 0                       |

We recommend you to replace devices connected to this logger to other logger, otherwise all connected devices will be deleted.

You can add again after deleting.

Buttons: Cancel, Confirm

At the bottom of the dialog box, there is a pagination control showing "View 20" and "1 / 1 Page 1 Results".